

October 31, 2022

Town of Skaneateles Planning Board Attention: Donald Kasper, Chairman 24 Jordan Street Skaneateles, NY 13152

Re: Project Narrative for Proposed Skaneateles Solar Farm

Tax Parcel #023.-05-01.1 & 024.-01-34.0

Town of Skaneateles, Onondaga County, New York

Dear Chairman Kasper and Planning Board Members:

TJA-NY-Skaneateles Solar Farm, LLC. is proposing the construction of a new community solar farm located at 740 Sheldon Road in the Town of Skaneateles. The Project site is situated in the Rural Residential or "RR" Zoning District. The Project will involve the construction of a 4.35 MW AC solar facility on an existing 50.58± acre parcel of land (024.-01-34.0). The proposed Project will also involve the construction of a limited use pervious gravel access driveway with emergency turnaround sections on an existing 54.09 acre parcel of land (023.-05-01.1). Additional scope of work will include the installation of a 7 ft high chain-link perimeter fence, underground and overhead electrical lines, power inverters, and utility poles.

The existing lots are vacant and consists largely of natural upland and forested habitats. There are several active agricultural fields on site being utilized for corn and hay production. In addition, there are four (4) wetlands and one (1) stream under the jurisdiction of the U.S. Army Corp of Engineers present on site. The project area is bounded to the north by Sheldon Road, to the east by forested habitat, to the south by active agricultural fields and forested habitat, and to the west by suburban residential properties.

The Project will interconnect to the local pre-existing electrical distribution system. Power generated from this facility will be sold directly to consumers via the State's Community Distributed Generation Program. This program allows customers to directly offset their energy use with local solar power, while saving money on their electrical bills. The proposed solar facility will utilize approximately 11,232 solar modules and 29 string inverters. Ground mounted single axis photovoltaic tracker panels will be utilized for the proposed solar facility. The associated tracking technology will allow the modules to maximize it's energy output by efficiently tracking the sun throughout the day. The modules will be mounted onto a steel racking system, which will be anchored into he ground using driven steel posts. The overall height of the solar array will not exceed 15 feet.

We acknowledge the importance of following all the provisions and requirements set forth by the Town of Skaneateles and will address any concerns that may arise in the goal to maintain the integrity of the Town's local laws. Items such as glare, noise, safety, security, pollution, traffic, and so forth will be thoroughly analyzed for the development of the Project. Please refer below to the previously discussed items.

 Local Law: The proposed Project will adhere to all setback, lot coverage, lot size, and associated requirements of the designated zoning and land use district. All project related documents will comply with the relevant site plan review standards and guidelines.



- <u>Glare:</u> Solar panels by their nature are designed to absorb sunlight not reflect it. We anticipate that there will be no increase in reflective lighting from the solar panels. In addition the proposed Project site is bounded by existing wooded habitats, creating a natural landscape buffer between adjoining properties.
- <u>Noise:</u> Solar farms are low noise emitting facilities. Inverters and transformers on site may generate a quite humming noise, but typically cannot be heard unless standing directly adjacent to the equipment. Standard operations and maintenance activities, such as utilizing lawn mowing equipment or site inspections may occur, but will generally create minimal noise. The construction phase will generate the largest increase in noise level due to heavy equipment, but will only occur during normal business hours.
- Safety: Solar arrays are designed to meet and or exceed all of the requirements of the National Electric Code (NEC), the utility service to which it will be connected to as well as any local requirements and safety regulations. All onsite personnel will be properly trained and the appropriate qualifications will be obtained to complete the task assigned. Following the completion of the Project, first responders and local emergency services will typically participate, at their discretion, in a site specific orientation and safety training session on what to expect and the proper steps to isolate the solar facility in an emergency situation. Proper warning labels will be placed on all electrical equipment and a warning sign will be placed along the perimeter fence access gate that will include the appropriate contact information.
- <u>Security:</u> As previously mentioned, a 7 ft high chain-link perimeter fence will encompass the entire solar facility to prevent the general public from accessing the Project site.
- Pollution/Toxicity: The proposed modules are made from environmentally friendly crystalline silicon panels that do not contain any toxic materials. The proposed transformers will utilize an environmentally friendly FR3 oil, which is essentially vegetable oil and does not produce any toxic odors or harmful gases. In addition, towards the end of the solar system life cycle, all defective panels will either be returned to the manufacturer for appropriate disposal or transported to a certified recycling facility where the glass, metal, and semi-conductor materials are separated and recycled. Once all site material have been removed, the Project site will be returned to pre-development conditions.
- <u>Traffic:</u> The proposed Project will not create an increase in traffic during normal business hours. In the event that traffic congestion is present, an appropriate traffic control plan will be implemented to maintain the normal traffic flow of the surrounding area. Safety measures will put in place to ensure the well-being of potential pedestrian traffic.
- Limited Use Pervious Gravel Access Driveway: Following the establishment of New York State's renewable energy objectives, the New York State Department of Environmental Conservation (NYSDEC) introduced a Solar Panel Construction Stormwater Permitting/SWPPP Guidance to accommodate the increasing development of solar farms. Part of this guideline introduces the use of a limited use pervious gravel for the site access driveway. The limited use pervious gravel is an NYSDEC approved material that contains several beneficial attributes in regards to stormwater management. In comparison to standard gravel or crusher-run material, the limited use pervious gravel will allow for greater infiltration of rainfall, therefore reducing surface runoff from the site. In addition, the porous gravel will allow for groundwater recharge and the removal of potential pollutants in the underlying soil. Although the Town of Skaneateles considers



any driveway as an impervious surface, regardless of the material used, the proposed limited use pervious gravel has all the properties that can designate the surface as being pervious. As well as providing positive stormwater treatment, the proposed limited use pervious gravel will involve less overall grading, disturbance, and tree clearing within the Project site. The limited use pervious gravel access driveway will only be utilized on a minimal basis throughout the year. The limited access will include routine site inspection and maintenance that may occur once a month.

- <u>Emergency Access:</u> The proposed limited use pervious gravel driveway has been designed to include turnaround sections for emergency vehicle entry and exit. In addition a knox box will be installed at the entrance gate to allow for unscheduled emergency access.
- Environmental Considerations: During the preliminary design of the Project certain site planning practices were implemented, such as preservation of undisturbed areas and buffers, reduction of clearing and grading, and locating the development in less sensitive areas. Although minimal disturbance may be anticipated within the delineated wetlands on site, only temporary impacts will occur due to minor construction traffic. To ensure that the natural hydrology of the site remains unchanged, any area within the wetlands that have been temporarily disturbed will be returned to existing conditions. Natural landscape buffers on the Project site will be maintained to ensure the integrity of scenic viewsheds and resources within the Town of Skaneateles. In the event that the solar facility is no longer active, all associated equipment and materials will be removed and the property will be returned to its predevelopment condition.
- <u>Lot Line Adjustment:</u> The proposed Project will involve a lot merger between Tax Parcel #023.-05-01.1 and 024.-01-34.0. The consolidation between the two lots will allow the Project to conform with all applicable zoning and solar regulations for the corresponding zoning district.
- Area Variance: The proposed Project will involve disturbance within a 100-ft wetland buffer and will therefore require an area variance from the Town Zoning Board of Appeals. Our attempts to avoid the wetland buffer are unfeasible due to natural hydrologic features to the west of the buffer zone and the property line to the east of the buffer zone. Access to the solar facility can only be accomplished by following the geometry of the existing field road on site and through the approval of the area variance.
- Local Utility Services: The proposed Project will generate clean electrical energy for the local community
 and will not have any impact to the public water, drainage, sewer, or any other utility service system in the
 Town.
- <u>Local Housing:</u> The availability of affordable housing in the Town of Skaneateles will not be impacted as a result of this Project. The Project site is a vacant lot, currently utilized for agricultural purposes.



This Project is an opportunity to generate a cleaner and more self-sufficient energy source available for the Town of Skaneateles, while also contributing to the New York State's renewable energy goals. We look forward to working with the Town of Skaneateles to advance this project through the local review and approval process. Should you have any questions or require any additional information, please feel free to contact me at 518.556.3631 or via email at eredding@BERGMANNPC.com.

Sincerely, Eric Reolding

Eric Redding, PE

Energy + Environment Discipline Leader, BERGMANN

Cc: Michael Frateschi, TJA Clean Energy, LLC.

TJA-NY-SKANEATELES SOLAR FARM, LLC. SKANEATELES SOLAR FARM

740 SHELDON ROAD TOWN OF SKANEATELES



LOCATION MAP

			SHEET INDEX
C000	SHEET 1 OF	18	COVERSHEET
CQ10	SHEET 2 OF	18	GENERAL NOTES
X100	SHEET & OF	18	EXISTING CONDITIONS PLAN
C100	SHEET 4 OF	18	OVERALL SITE PLAN
C101	SHEET 5 OF	18	SITE PLAN
C120	SHEET 8 OF	18	OVERALL GRADING & EROSION CONTROL PLAN
C121 - C122	SHEET7-8 OF	18	GRADING & EROSION CONTROL PLAN
C200 - C301	SHEET 9 - 10 OF	18	DRIVEWAY PROFILE
C600 - C507	SHEET 11 - 18 OF	18	DETAILS I - DETAILS VIII

PROJECT INFORMATION:

LATITUDE: 42.977653 N LONGITUDE: 76,453836 W

TOWN: SKANEATELES
COUNTY: ONONDAGA
STATE: NEW YORK

PROJECT OWNER/APPLICANT:

TJA-NY-SKANEATELES SOLAR FARM, LLC. 150 JOHN VERTENTE BOULEVARD NEW BEDFORD, MA D2745 PH; (315) 55-9244 CONTACT: MICHAEL FRATESCHI

PREPARED BY:

BERGMANN 2 WINNERS CIRCLE, SUITE 102 ALBANY, NY 12205 PH: (518) 558-3631 CONTACT: ERIC REDDING, P.E.

County to Despute Associates, Garage In. Brigany

COVER SHEET


C000


CALL BEFORE YOU DIG!





TJA-NY-SKANEATELES SOLAR FARM, LLC.


SKANEATELES SOLAR FARM 740 SHELDON ROAD SKANEATELES, NY 13152

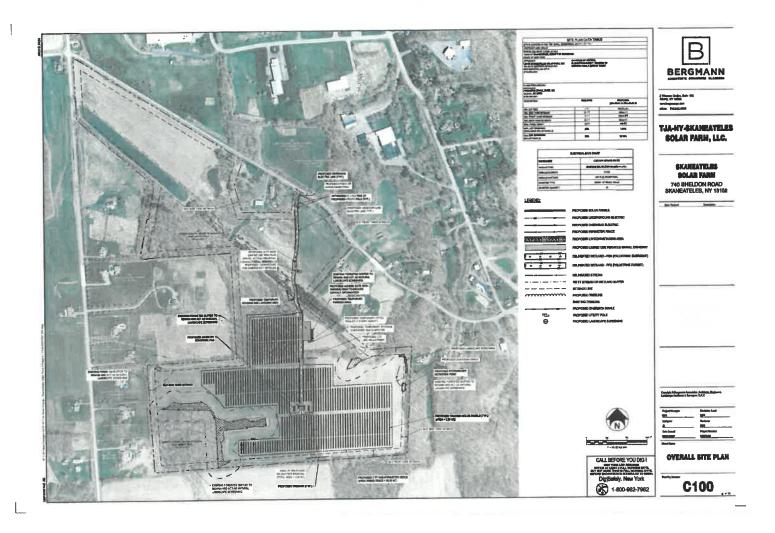

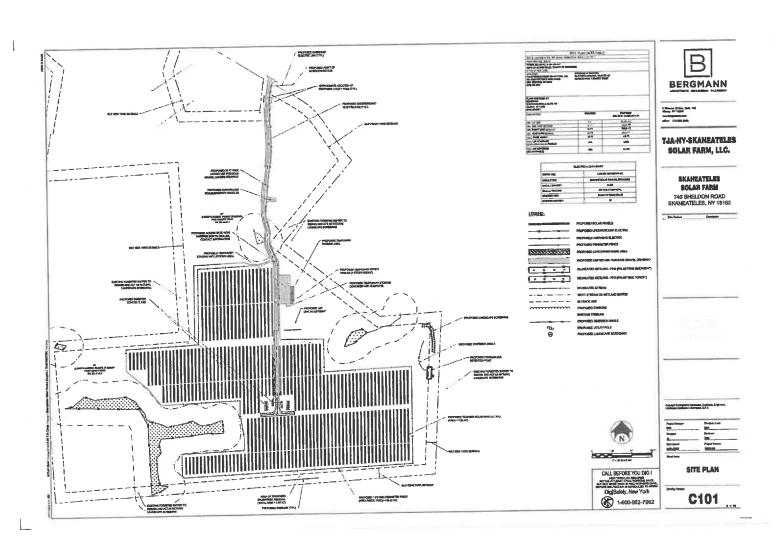

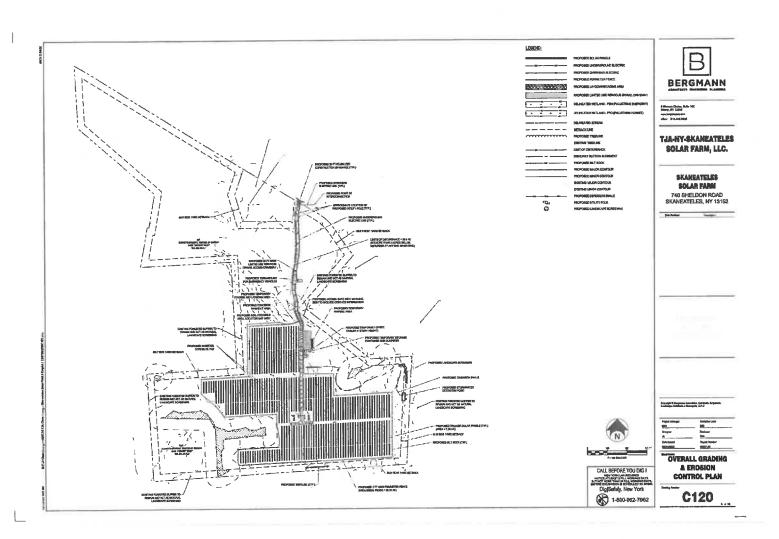

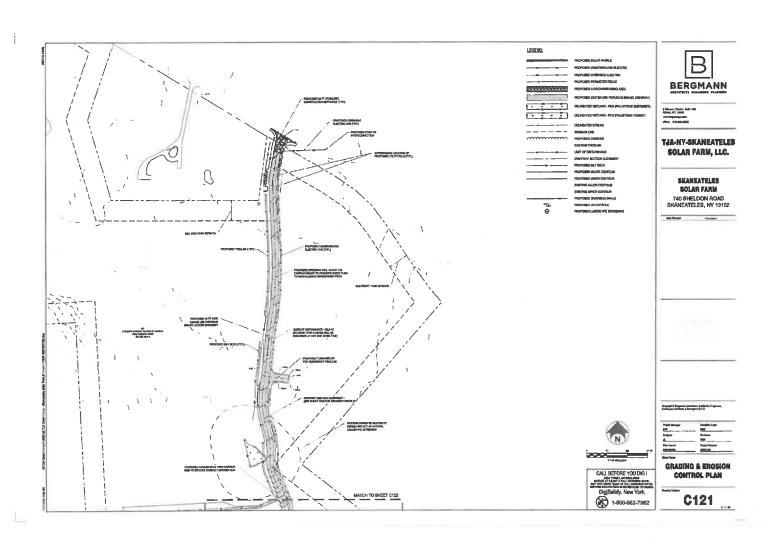

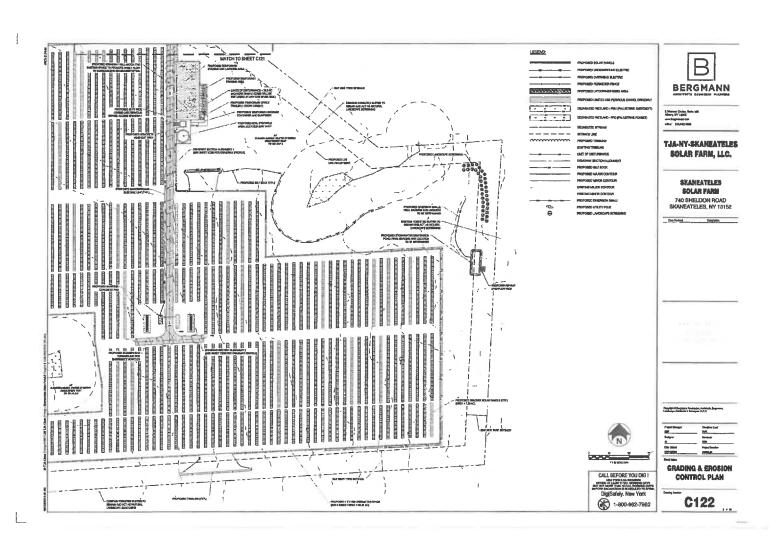



Sunfolding T29™ Single Axis Tracker

The Sunfolding T29th Single-Axid Tracker Improves project profitobility by unlocking value on land with chollenging terrols, soft and also boundaries. With a design flexibility unmortated by your other tracker on the marriast the Sunfolding T29 adopts to also features and streamlines installation and operations.

With tracker rowe that can be virtually any length and nervoring reachanical linkages from the field, the Surfolding 129 goes on undulating terrain with na change to the atandard product and requires mismal grading.

Sees construction timelines and simplify logistics and material handling with fewer parts and standard off-the-shelf components and tools

Upgrade your expectations of what a solar tracker can do for you

w/w.schilding.com

Different Tracker Langths. One Cost. Sunfolding trackers can easie down to 2-posts without importing costs. Fill every corner of the project site with solar modules and trackers for optimal effectifications.

Move Less Dirt. Shorter tracker sows can follow hills and minimize the need to move dirt. Develop on complex ternain without lattening the land and reduce costs

Steptify Foundations.
With lighter loads on each foundation,
Sunfalding projects have lower
embedment depth, use less steel, and
modute the risk of post rejection in all
soil types.

Sunfolding T29 Technical Specifications

Tracking Types	Horizontal single-axis tracker with distributed actuation		
Drive Type	Sunfolding AirDrive X		
Pypical Dimensions	Height: -3 ft (0,9m) Length: 1 to 2 module strings in length (-20 to 50 modules per structure) Whith: 1 module is portrait;		
Tracker-te-Tracker Specing	North & South: > 6 in (>150 mm)		
Directoral Maherlols	Galvanized steel		
Wind Lead	305 mph GAB kpts (3-excondiguess per ASCE7-)(I (scandard) Up to 130 mph (209 kpts) (available)		
Smoot Lond	5 psf (C2N kPs), higher available upon request		
Foundation	All tournation types 69 feet per, concrete foundation, ground screw believed, pound()		
SEAL NOTE IT DIES	The state of the s		
Hodale Configuration	Single module in portrait (1P)		
Module Specing	8 mm		
Exported Medales	All commercially available framed and frameless crystalline and thin frim modules		
Medale Attachment	Module repunting via top mount clips (with integrated grounding) secured per manufacturer's recommendations		
Ground Coverage Ratio (GCR)	Fully configurable, typical range 25% - 55%		
Steps Tolorance	17.5% N - S. Unwinded E - W		
Desired Spalera	Array controller, plus tracker controllers		
Data Food	Modbus TCP/IP		
John Tracking Method	GPS time and location based on astronomical algorithm		
Buddrading	Yes (this film tracking available)		
s as bellevilled the	(Smirks 19)		
relabelen	No specialized tools		
Adatasana	Completely centralized. No actuator lubrication required.		

erver authoriting.com



RACKING SYSTEM DETAIL NYL



P Minus Crain, Sales Many, SF 1200 other PRANCING


TJA-NY-SKANEATELES SOLAR FARM, LLC.

SKANEATELES SOLAR FARM 740 SHELDON ROAD 8KANEATELES, NY 19152

DETAILS VII

C506

CALL BEFORE YOU DIG I
DigiSafety, New York
1-800-962-7962



OR APPROVED EQUIVALENT

WHEN PAWL GRADE IS ACHIEVED DURBIG NOH-GERRIENTING INCHTOR, THE AREA SHOULD BE THEN CHARLY STRAULED LATTLE THE BEGINNING OF THE INEXT PAUTING SERVICED OR APPLIED AT THE AREA CANNON WHEN TABLE VIEW LITTLE IMAGE ACKNOWN WHEN TABLE VIEW LITTLE IMAGE GROUND SHOULD BE VISSUE THROUGH THE MALICH.

80	L MADICARDIT	PERACRE	PER 1,000	PER 1,890 CY .Q6	MOTES	
0	ARRICULTURAL LIME	8 TOHS	2001.0	2,440 LB.	OR AS PER SCIL TREET:	
	90-19-20 PERTRUMEN	1,960 L.E.	25 19.	210 LB,	ABRICULTURAL FIELD	
CARRO	AGRICULTURNI, LIME	1 TON	e01.h	419 LB.	TYPICALLY MOT BECAMED FOR	
ğ	10-10-20 PRETALIZER	BBD LB.	12.418.	100 LB.	TOPEGE STOCKED	
		COME	ACHANTE TROP	108 203		
Ξ	ORGANIC MATTER	CONTENT	87%	- HOUSE (CITCY MICHOLI	(T BARR)	
ORIGINAS PORTION				BROUG AND ELON	ONTED	
pi)		U-D				
MOSSTURE CONTENT				MPL-MPC		
PARTICLE BIZE		SER PARK THROUGH IT BEREEN S.E offers developing MANEGAN				
-	OR LIBER BALT CON					
		MURCH		distriction of the second of t		
		MURCH	APPLICATION F	distriction of the second of t		
	OLUME BALT CON	MARCH.	APPLICATION F	dikin (evilosikri) M RATES MRU) PRIN 1,800	AVENENI	
	ON LIBER BALT COME	MURCHA AP PER AGRE	APPLICATION F PLICATION RATE (PER 1,000 BQL PT.	EATES HAVE PER 1,800 89, YD.	NOTES BY-HER WHENT OR OUT STREAM, PRICE OR DIS SPOIL Y BROUGHT SHOULY BROUGH	
	OR LIBEE BALT CONC BRACH TYPE STRUM	MULCHANDE PER ACRE 3 TOHS	APPLICATION F PLICATION RATE (PER 1,000 BQ. PT. 140 LS.	CATES HAVE PSH 1,000 SQ. YO. 1,249 LB.	NOTES BY HER WEST OR ONE STREET PROCESS BY HER WEST OR ONE STREET PROCESS BY HER WEST OR ONE STREET PROCESS CONTROL AND TREET OWN OF THE ACCORD OR ONE STREET PROCESS CONTROL AND TREET PROCESS CONTROL AND TREET CONTROL OR CONTROL OR CONTROL OR CONTROL OR CONTROL CO	
	OR LIBER BALT CONC WALLOW TYPE. STRAW HARY	MLECH APPPER ACRES STONES	APPLICATION IS PLIGATION RATE (PER 1,000 BG, FT. 146 LS.	CATES WATES WHILL PRIN 1,000 SQL YO. 1,240 LB. T,240 LB.	HOTELS BY HORSE YEAR BY HORSE YEAR BY HORSE YEAR BY HORSE YEAR THAT HORSE YEAR FOR CHIEF HORSE CLOWER AND THAT HORSE FOR CHIEF AND THAT F	

SITE STABILIZATION SEED MIX

	FITABLESATION FITAND NO PANNEL 9124	_
	ACRE, OR 1/2 LB PER 1,000 MQ FT	
SCICHTETIC NAME	COMMON WANT	% OF AR
CAREX VAR.PHOIDEA	FOX BEDGE	20%
ESPENDOPEDA CRUBBALLI WAR, FRUMENTACEA	ANY DISERSE SHARET	2005
ELYMEN VIRGINICES	VIRGINA WED RYE	20%
POLYGORUM PRINEYLIANICUM	PERMITTAKE AMARTMEET	19.5%
AGRICIETIE SCAERA	TICKLEGRADS PROUGH BENTOFURS)	8%
PANICUM VIRGATUM, SHELTER	BHIS.TER BATTCH ORASS	EN.
CARREX STIPATA	AML BEDGE	3%
PANICUM CLANDESTIMUM	TOGA DEER YOMBUE	3%
CAREX SCOPARA	BLUNT BROOM SEDGE	2.8%
BOENS CERVALA MEX	HOODSHO BUR MARKSOLD BIEK	1%
AMOUS TEMAS	PATH RUSH	1%
MULCH: STRAW GLEEDING TATIL 6 000 LINE FIRST AN	CMEX	
COMPANY	BIPORGIATION	
	UKTON BÖZGIL BKC	
	PRICE, METADANILE, MICHAELE	
PORT	en en en	
MUR HTTP MAN	W. ENISTREED, DOM:	

STREAMBANK & WETLAND SEED MIX

% OF the BLOS 20.0% 10.0% 10.0% 10.0% 10.0% 10.0% 10.0% 10.0% 10.0% 10.0% *OR APPROVED EQUIVALENT

FUZZ & BÚZZ MIX TO BE LIBED PRIBDE THE FÉRICZÓ AREAS, UPLAND BEED MIX TO BE USED DUTIED ÉTHE FERICE.

POLLINATOR SEED MIX

	BOB, RESTORATIO	N REGULEREMENTS	
TYPE OF BOIL DISTURBANCE	BOIL RESTUR	ATION REGUIREMENT	COMMENTALEXAMPLES
NO BOIL DISTURBANCE	PERTOPATION NOT PERMITTED		PREDEDWATION OF NATURAL PRATURES.
MANAGE BOIL DISTLINGUANCE	RESTORATION NOT REQUIRED		CLEATERS AND GREENING
AREAS VANCER TOPACIE IS STREPTCO ONLY - NO	HOG ALE	HBG CAD	PRICTERT AREA FROM ANY ONGURIS
CHANGE IN GRADE	APPLY 6 DESPER OF TOPSON	AERATE AND APPLY 8 SHOHES OF TOPSOIL	CONSTRUCTION ACTIVITIES.
	HBG AKS	HING CAD	
AREAS OF CUT OR PILL	ASTATE: AND APPLY 6 INCHES OF TOPSOS.	APPLY PULL BOIL RESTORATION*	
HEAMY TRAPPIC AREAS ON SITE (ETPECIALLY SI A ZONE S-25 FIRST ANOUND BURLDINGS BUT NOT WITHOM A 5 POOT PREMIETER AROUND FOUNDATION WALLS	APPLY FIRL SOL RESTORATION (DECOMPACTION MO COMPOST EDMINISMENT)		
AMBAS WHERE PLANOP RETAILSTION AND/OR NEW THATION PRACTICES ARE APPLIED		RED, BLIT MAY BE APPLIED TO N BPECIPED FOR APPROPRIATE	ICHEP CONSTRUCTION EQUIPMENT PROMI CROSSIPES THESE AREAS. TO PROTECT REVILLY REPLACED PROMING ONGOING CONSTRUCTION ACTIVITIES CONSTRUCT A BROLLE PHASE OPERATION PENCE AREA.
REDEVELOPMENT PROJECTE		OLINED ON REDEVELOPMENT RE EXISTING IMPERVIOUS AREA PERSONS ASPA.	

TLAN LISE APPROPRIATE GROUND COVER WITH CHEP PROTS TO IMMOTAN THE BOLL STRUCTURE. TURE OR A MINERAL COMPONENT AND DROMAC MATERIAL SUCH AS COMPOST, AT THE BID OF THE PROJECT IS IM METAL DAY IS POSED BY OTH BIRDLY AND WITH BOTH MEGANT, THE BID ON DAY AS PERFORMENT BEST ON COMPUTE THE THE TRANSLATIONS THAN A PRE-WITHOUT A ROCKES OF THE SURFACE.

SOIL RESTORATION DETAILS

CALL BEFORE YOU DIG I MAN YORK JAW RECOME NOT THE RECOME OF THE PROPERTY OF THE RECOME OF THE RECOME



2 Shear Crain, finis 500 Almy, 67 E305 wedsynerys.com plac \$14,545,455

TJA-NY-SKANEATELES SOLAR FARM, LLC.

SKANEATELES SOLAR FARM 740 SHELDON ROAD SKANEATELES, NY 19152

Complete St. Surgerma, Associates, Scribbath, Scribbath, Eurobeaper Scribbath & Statempoon, 199,0

DETAILS VIII

C507